








MRK.	DATE	REVISION	SIGN
△			

SPECIFICATION


- Rating : 100mA, DC 42V (Switching)
400mA, DC 42V (None-Switching)
- Contact Resistance : 80mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : 120±30gf Max
- Life cycle : 25,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 70pcs Tube / 600pcs Reel Packing

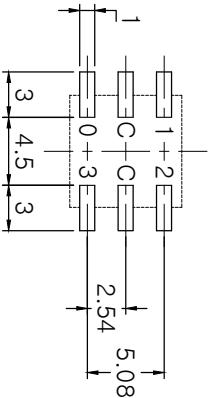

P.C.B DIMENSION (Top View)



ACTUATOR



Decimal Code				
04	C	0	1	2
P	●	●		
o			●	
s	●			
i				●
t	●			
i			●	
o				●
n	●			

DRAW/DESIGNED	CHECKED	APPROVED	G.TOL		TITLE	REV.
J.S YANG	W.J LEE	K.I LEE		±0.3	ROTARY DIP SWITCH	
2021-10-13	2021-10-13	2021-10-13	UNIT	SCALE	MODEL NO.	
			mm	2:1	MSSM-04S	
BONS DA 深圳市子庚科技有限公司			SIZE	DRAW NO.	MSSM-04S-03	03
			A4			