





MRK.	DATE	REVISION	SIGN
------	------	----------	------

SPECIFICATION




1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

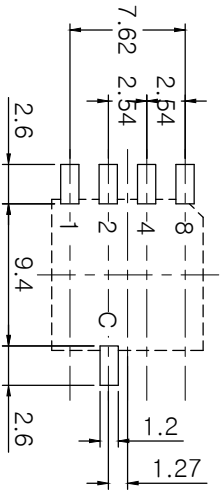

P.C.B DIMENSION (Top View)

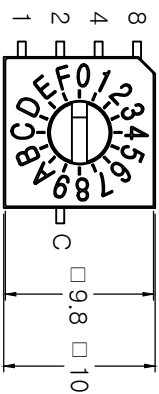

ACTUATOR

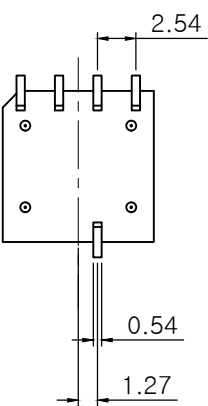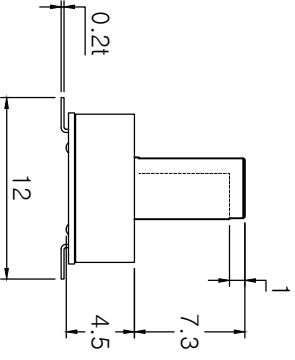

Real Coded							
	C	1	2	4	8		
0	●					0	
1	●	●				1	
2	●		●			2	
3	●		●	●		3	
4	●			●		4	
5	●	●		●		5	
6	●		●	●		6	
7	●		●		●	7	
8	●				●	8	
9	●	●			●	9	
10	●		●		●	A	
11	●		●		●	B	
12	●			●	●	C	
13	●	●		●	●	D	
14	●			●	●	E	
15	●		●	●	●	F	

16
P
o
s
i
t
i
o
n

DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE
J.S YANG	W.J LEE	K.I LEE		±0.3	ROTARY DIP SWITCH
2021-10-29	2021-10-29	2021-10-29	UNIT	SCALE	MODEL NO.
			mm	2:1	HASR-16S
BONSDA 深圳市子庚科技有限公司			SIZE	DRAW NO.	REV.
			A4	HASR-16S-03	03