

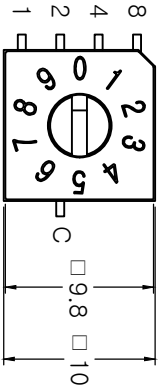



MRK.	DATE	REVISION	SIGN
△			

SPECIFICATION




- Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
- Contact Resistance : 100mΩ Max
- Insulation Resistance : 100MΩ Min
- Operating Force : 700gf Max
- Life cycle : 10,000 steps
- Sealing : IP67 (Dust & Water proof)
- Packing : 50pcs Tube

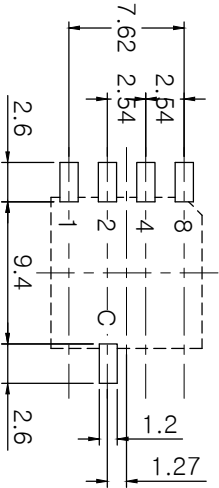

P.C.B DIMENSION (Top View)



ACTUATOR

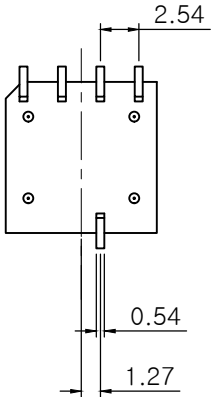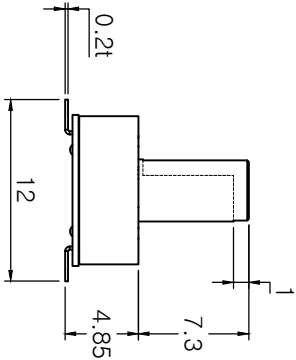

Real Coded					
	C	1	2	4	8
0	●				0
1	●	●			1
2	●		●		2
3	●	●	●		3
4	●			●	4
5	●	●		●	5
6	●		●	●	6
7	●	●	●		7
8	●				8
9	●	●			9

10 Positions

DRAW/DESIGNED	CHECKED	APPROVED	G.TOL		TITLE	ROTARY DIP SWITCH
Y.S KIM	B.S KANG	K.I LEE	UNIT	SCALE	MODEL NO.	
2021-08-13	2021-08-13	2021-08-17	mm	2:1	HASR-10S	REV.
 BONSODA Co., Ltd. 深圳市子庚科技有限公司					DRAW NO.	HASR-10S-03
 A4					03	