
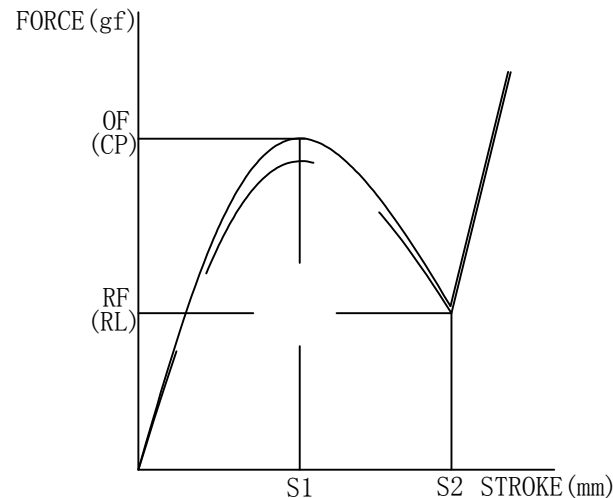
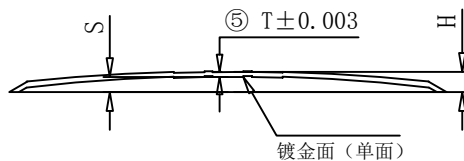
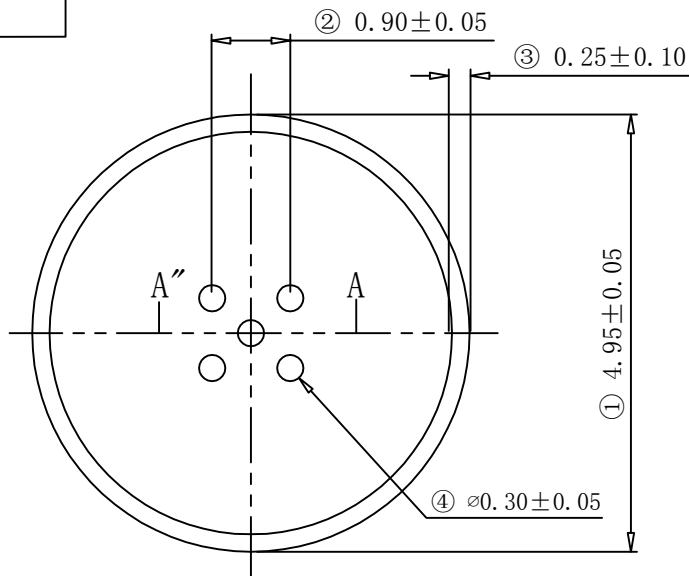


Product draw

寿命测试规范:
Specification for life testing:
测试头为直径1.8mm铜质平头,
Copper, 1.8mm cylinder flat head,
打击力度为2倍之弹片标准荷重规格
Hit force is 2 times standard Froce specification
打击速度为120次/分, 打击位置为弹片正中心,
Speed: 120cycles/min, Right in the center of the Dome.
测试治具底部为平面;
Height of fixture: 0mm



OF: OPERATING FORCE (gf)
CP: COMPRESSION PEAK POINT
RF: RETURN FORCE (gf)
RL: RELEASE LOW POINT
S: STROKE (mm)
CR: CLICK RATIO
CR = $[(OF - RF) / OF] \times 100\%$
RESISTANCE: $\leq 100m\Omega$

代号说明							
Code description							
J	散装包装 Bulk packing						
C	圆形 Round						
5D	下凸五点 5 dimples						
DJ	镀金 Gold plated						
序号	产品代号	材料厚度	动作荷重	手感率	弹片高度	行程	动作寿命
Item	Model	Materials T(mm)	Operating Force (g)	Click Ratio (%)	Hei ght H (mm)	Travel S (mm)	Operating life (cicles)
1	SD-X5C25-5D-DJ	0.06	250±30	55±15	0.30±0.03	0.24±0.03	500000