

Product draw

寿命测试规范:

Specification for life testing:

测试头为直径2.0mm铜质平头,

Copper, 2.0mm cylinder flat head,

打击力度为2倍之弹片标准荷重规格





Hit force is 2 times standard Froce specification

打击速度为120次/分, 打击位置为弹片正中心,

Speed:120cycles/min, Right in the center of the Dome.

测试治具底部为平面;

Height of fixture: 0mm

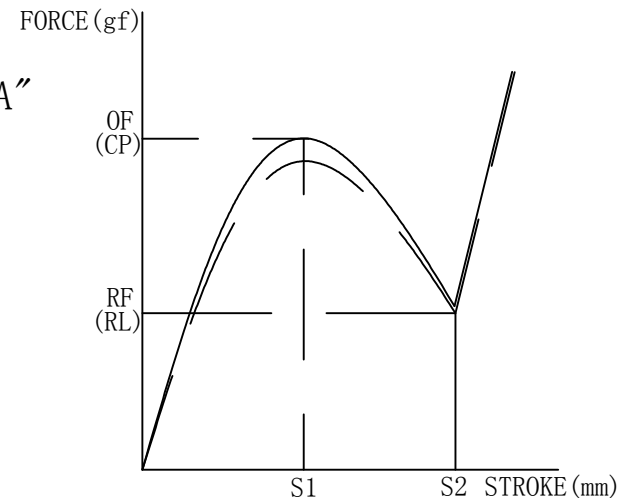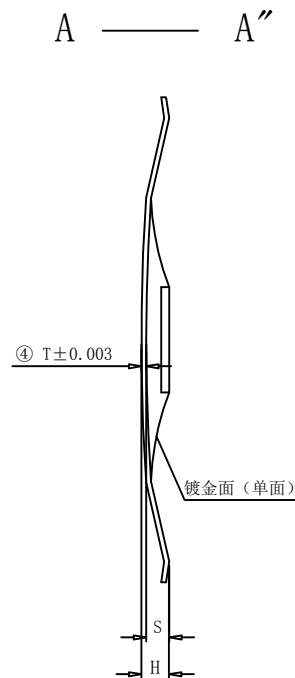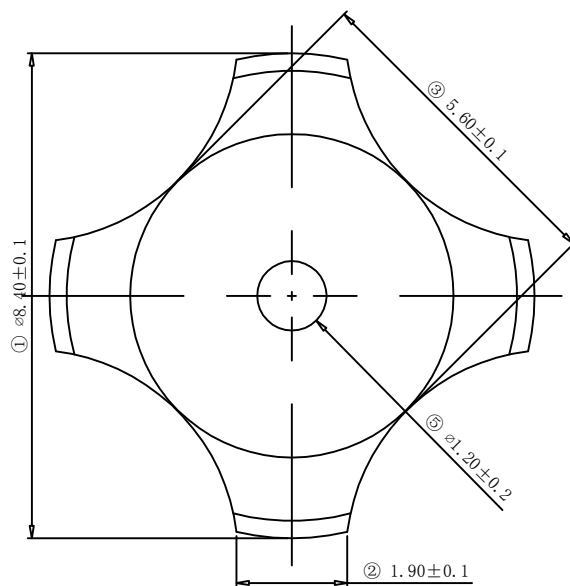

FORCE CHARACTERISTICS

OF: OPERATING FORCE(gf)

CP: COMPRESSION PEAK POINT

RF: RETURN FORCE(gf)

RL: RELEASE LOW POINT

S: STROKE(mm)

CR: CLICK RATIO

CR= [(OF-RF)/OFx100]%

RESISTANCE: ≤100m Ω

代号说明
Code description

J	散装包装 Bulk packing
A	四角 Cross
1D	下凸单点 1 dimple
DJ	镀金 Gold plated
序号 Item	产品代号 Model
1	SD--X84A22-1D-DJ

BONSDA 深圳市子庚科技有限公司

核 准 APPROVED	核 对 CHECKED	制 图 DRAWN
		王瑾雅 2023.02.23

比例 SCALE	1:1	单位 UNIT	毫米 MM	图 号 DWG NO	X84A22-1D-DJ
材 质 MAT.	SUS301	三角法 TRIGONOMETRY			
产品名称 PRODUCT NAME	金属弹片 METAL DOME	储存温度 DEPOSIT TEMPERATURE			+80° -20°
表面处理 PRCS.	AU, 0.05UM MIN	版 次 No.REV.			A0