
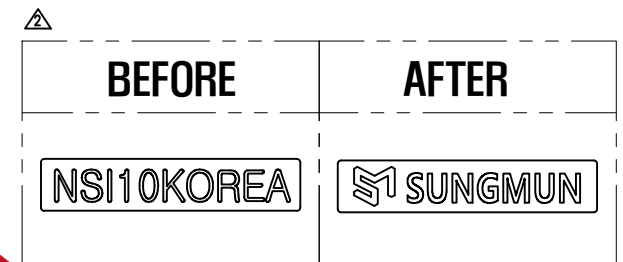






REV NO.	DATE	REVISION	DR	CH	APP
△	22.12.16	CHANGE THE MARKING	H.S LEE	K.N KIM	W.J LEE
△	23.10.13	DIN ISO-2768-1m tolerance applied	H.S LEE	K.N KIM	W.J LEE

## SPECIFICATION

1. Rating : DC12V 0.5A~24V 0.3A.
2. Contact Resistance : 30mΩ Max.
3. Travel : 1.6mm.
4. Operating Force : 250gf ± 150gf.
5. Life Cycle : 2,000 Cycle (with load).
6. Packing : 200pcs Vinyl Bag



Din ISO-2768-1m						DRAW/DESIGNED	CHECKED	APPROVED	G.TOL	TITLE	REV.	
Ranges	0.5~3	3~6	6~30	30~120	120~400	H.S LEE	K.N KIM	W.J LEE	±0.1	MINI SLIDE SWITCH	NSI-10H	
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5	2022-12-13	2022-12-13	2022-12-13	UNIT mm	SCALE N:S	MODEL NO. NSI-10H-03	03
						SUNG MUN ELECTRONICS CO.,LTD			SIZE A4	DRAW NO.		