
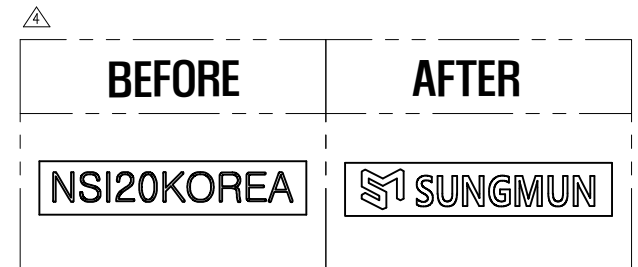


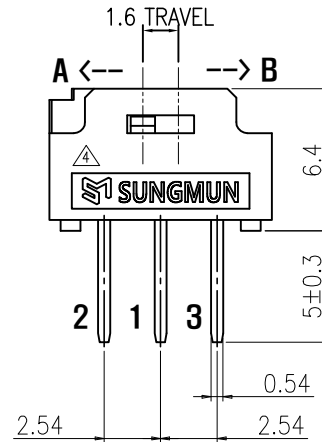




REV NO.	DATE	REVISION	DR	CH	APP
⚠	22.06.03	CHANGE THE MARKING	K.N KIM	W.J LEE	K.I LEE
⚠	23.10.13	DIN ISO-2768-1m tolerance applied	H.S LEE	K.N KIM	W.J LEE

## SPECIFICATION

1. Rating : DC12V 0.5A~24V 0.3A.
2. Contact Resistance : 30mΩ Max.
3. Travel : 1.6mm.
4. Operating Force : 250gf ± 150gf.
5. Life Cycle : 2,000 Cycle (with load).
6. Packing : 200pcs Vinyl Bag

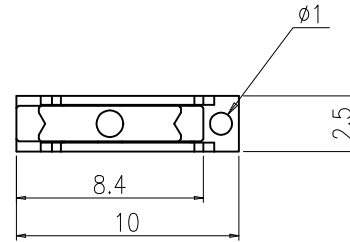

Din ISO-2768-1m						DRAW/DESIGNED	CHECKED	APPROVED	G.TOL ±0.1	TITLE MINI SLIDE SWITCH	MODEL NO. NSI-20	REV. 05
Ranges	0.5~3	3~6	6~30	30~120	120~400	J.S YANG	W.J LEE	K.I LEE				
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5	2021-11-15	2021-11-15	2021-11-15				
						UNIT			SCALE	MODEL NO.	NSI-20	REV.
						mm			3:1	MODEL NO.	NSI-20	REV.
						SIZE			A4	DRAW NO.	NSI-20-05	05

**SUNGMUN ELECTRONICS CO.,LTD**