
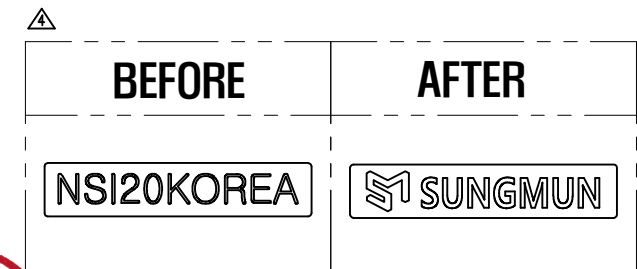



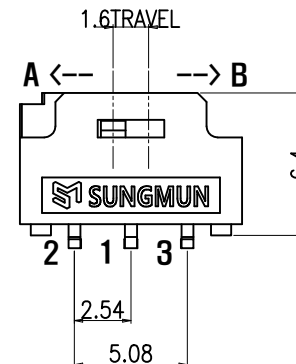




REV NO.	DATE	REVISION	DR	CH	APP
⚠	22.12.16	CHANGE THE MARKING	H.S LEE	K.N KIM	W.J LEE
⚠	23.10.13	DIN ISO-2768-1m tolerance applied	H.S LEE	K.N KIM	W.J LEE

SPECIFICATION

1. Rating : DC12V 0.5A~24V 0.3A.
2. Contact Resistance : 30mΩ Max.
3. Travel : 1.6mm.
4. Operating Force : 250gf ± 150gf.
5. Life Cycle : 2,000 Cycle (with load).
6. Packing : 200pcs Vinyl Bag / 700pcs Reel Packing



DRAW/DESIGNED	CHECKED	APPROVED	UNIT	G.TOL	TITLE	MODEL NO.	REV.
J.S YANG	W.J LEE	K.I LEE	mm	±0.1	MINI SLIDE SWITCH	NSI-20S	
2021-11-17	2021-11-17	2021-11-17		N:S		NSI-20S-05	05
SUNGMUN ELECTRONICS CO.,LTD			A4				