
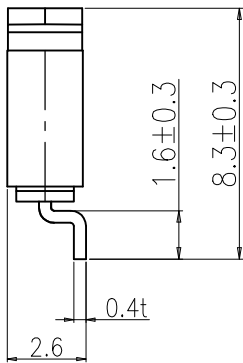

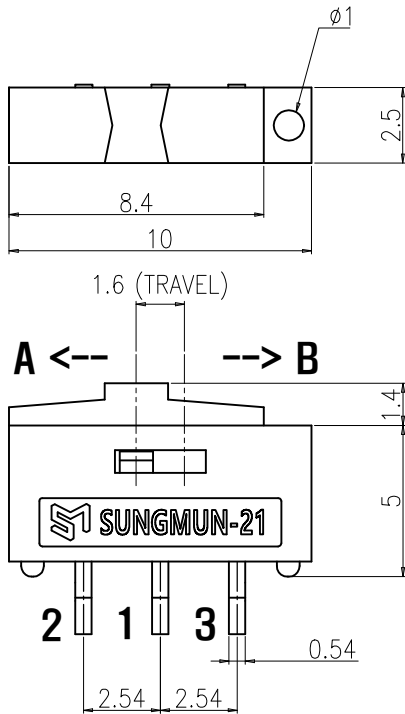
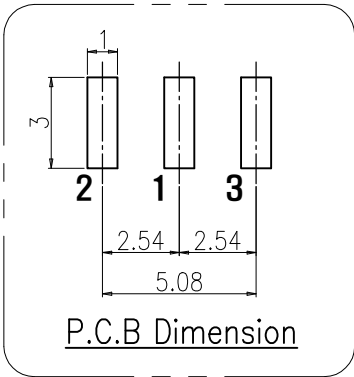


REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION

1. Rating : DC12V 0.5A~24V 0.3A.
2. Contact Resistance : 80mΩ Max.
3. Travel : 1.6mm.
4. Operating Force : 250gf ± 150gf.
5. Life Cycle : 2,000 Cycle (with load).
6. Packing : 200pcs Vinyl Bag / 1,500pcs Reel Packing

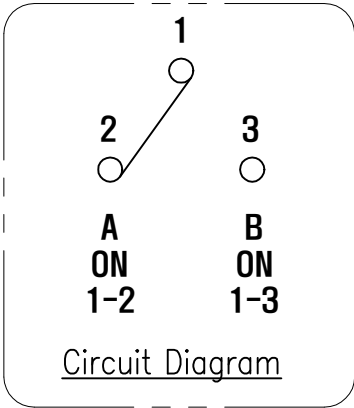

Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

01 NO.	DESCRIPTION			MATERIAL	COLOR / FINISH	REMARK
DRAW/DESIGNED	CHECKED	APPROVED		G.TOL	TITLE	MINI SLIDE SWITCH
K.N KIM	W.J LEE	K.N KIM		SCALE	MODEL NO.	NSI-21HS
2024-04-25	2024-04-25	2024-04-25		SIZE	DRAW NO.	NSI-21HS-01
邦斯达 BONSDA 深圳市子庚科技有限公司						REV. 01